

2HT(M) Performance Curve

Test Oil: ISO-VG2 Oil Temperature: 40C (Average)

Note: As the temperature of oil drops in winter, the viscosity also increases and so does the required power. So please be careful as you may not be able to operate the pump near the rated pressure.

1450 min⁻¹



■ ①203HT ■ ②204HT ■ ③206HT ■ ④208HT
■ ⑤210HT ■ ⑥212HT ■ ⑦216HT ■ ⑧220HT

Small capacity

Medium capacity

Large capacity

Others

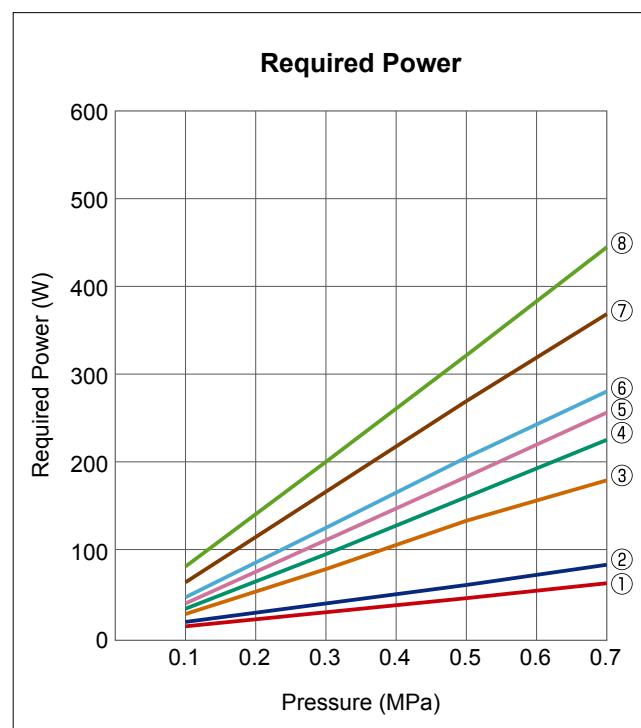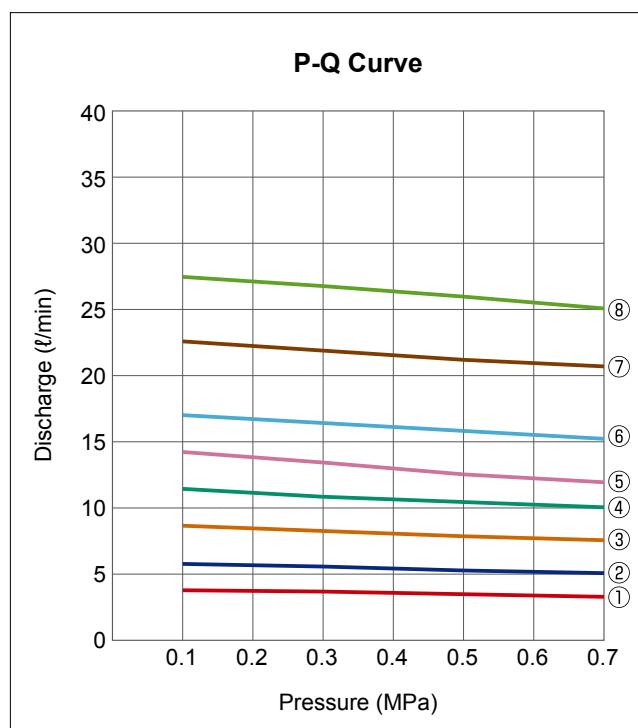


Item	Discharge (l/min)				Required Power (W)			
	Pressure (MPa)				Pressure (MPa)			
	0.1	0.3	0.5	0.7	0.1	0.3	0.5	0.7
Model								
TOP-203HT	3.7	3.6	3.4	3.2	15	31	47	64
TOP-204HT	5.7	5.5	5.2	5.0	20	41	62	85
TOP-206HT	8.6	8.2	7.8	7.5	29	80	135	181
TOP-208HT	11.4	10.8	10.4	10.0	35	97	162	227
TOP-210HT	14.2	13.4	12.5	11.9	41	113	185	258
TOP-212HT	17.0	16.4	15.8	15.2	48	127	207	282
TOP-216HT	22.6	21.9	21.2	20.7	65	168	271	370
TOP-220HT	27.5	26.8	26.0	25.1	83	202	323	446

Any disassembly or alteration of the product will void the warranty.

Test Oil: ISO-VG2 Oil Temperature: 40C (Average)

Note: As the temperature of oil drops in winter, the viscosity also increases and so does the required power. So please be careful as you may not be able to operate the pump near the rated pressure.

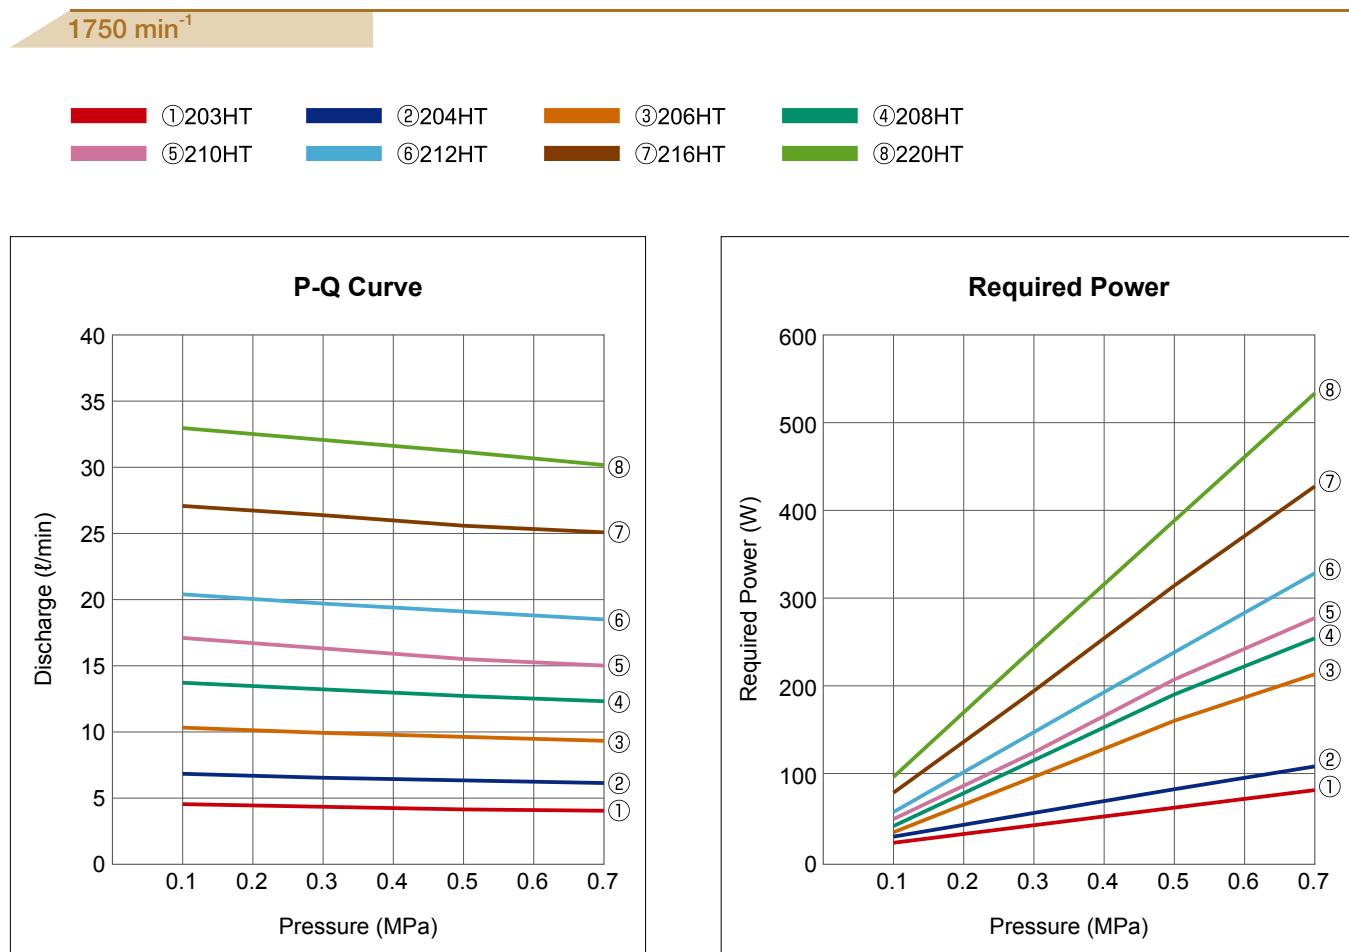

Item	Discharge (l/min)				Required Power (W)			
	Pressure (MPa)				Pressure (MPa)			
	0.1	0.3	0.5	0.7	0.1	0.3	0.5	0.7
TOP-203HT	4.5	4.3	4.1	4.0	23	43	63	83
TOP-204HT	6.8	6.5	6.3	6.1	30	57	84	110
TOP-206HT	10.3	9.9	9.6	9.3	35	98	162	215
TOP-208HT	13.7	13.2	12.7	12.3	42	117	192	256
TOP-210HT	17.1	16.3	15.5	15.0	50	126	209	279
TOP-212HT	20.4	19.7	19.1	18.5	58	149	240	330
TOP-216HT	27.1	26.4	25.6	25.1	80	196	316	429
TOP-220HT	33.0	32.1	31.2	30.2	98	245	390	535