

1A/1MA Performance Curve

Test Oil: ISO-VG46 Oil Temperature: 40C (Average)

Note: As the temperature of oil drops in winter, the viscosity also increases and so does the required power. So please be careful as you may not be able to operate the pump near the rated pressure.

1450 min⁻¹

①10A ②11A ③12A ④13A



Small capacity

Small to medium capacity

Medium capacity

Large capacity

Others

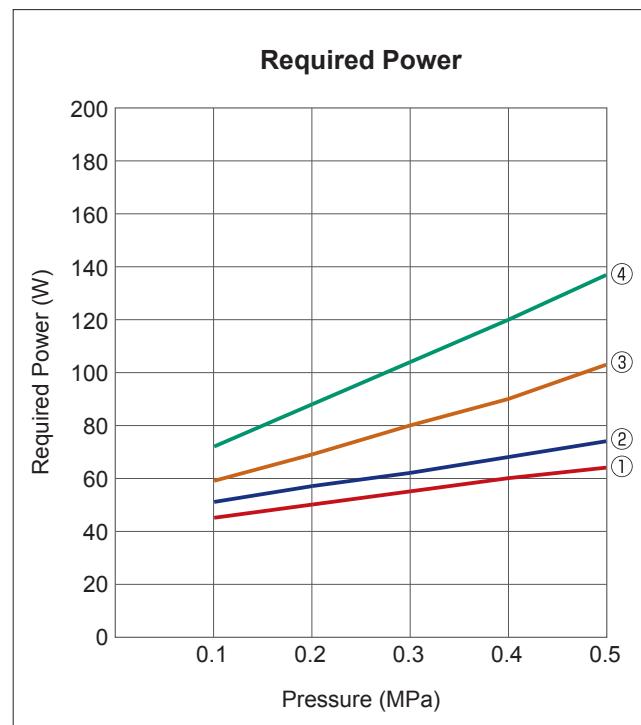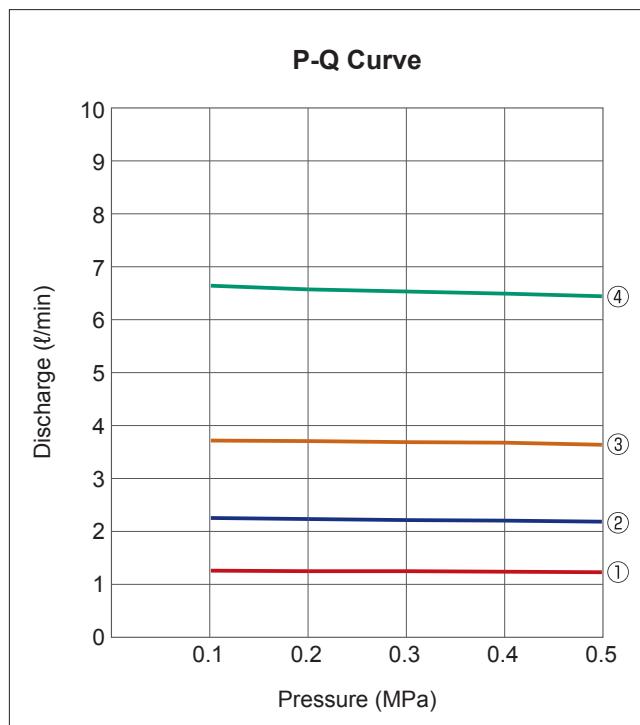


| Model | Item | Discharge (l/min) | | | | | Required Power (W) | | | | |
|----------------|------|-------------------|------|------|------|------|--------------------|-----|-----|-----|-----|
| | | Pressure (MPa) | | | | | Pressure (MPa) | | | | |
| | | 0.1 | 0.2 | 0.3 | 0.4 | 0.5 | 0.1 | 0.2 | 0.3 | 0.4 | 0.5 |
| TOP-10A | | 1.24 | 1.23 | 1.23 | 1.22 | 1.21 | 45 | 50 | 55 | 60 | 64 |
| TOP-11A | | 2.24 | 2.22 | 2.20 | 2.19 | 2.17 | 51 | 57 | 62 | 68 | 74 |
| TOP-12A | | 3.71 | 3.70 | 3.68 | 3.67 | 3.63 | 59 | 69 | 80 | 90 | 103 |
| TOP-13A | | 6.65 | 6.58 | 6.54 | 6.50 | 6.45 | 72 | 88 | 104 | 120 | 137 |

Any disassembly or alteration of the product will void the warranty.

Test Oil: ISO-VG46 Oil Temperature: 40C (Average)

Note: As the temperature of oil drops in winter, the viscosity also increases and so does the required power. So please be careful as you may not be able to operate the pump near the rated pressure.

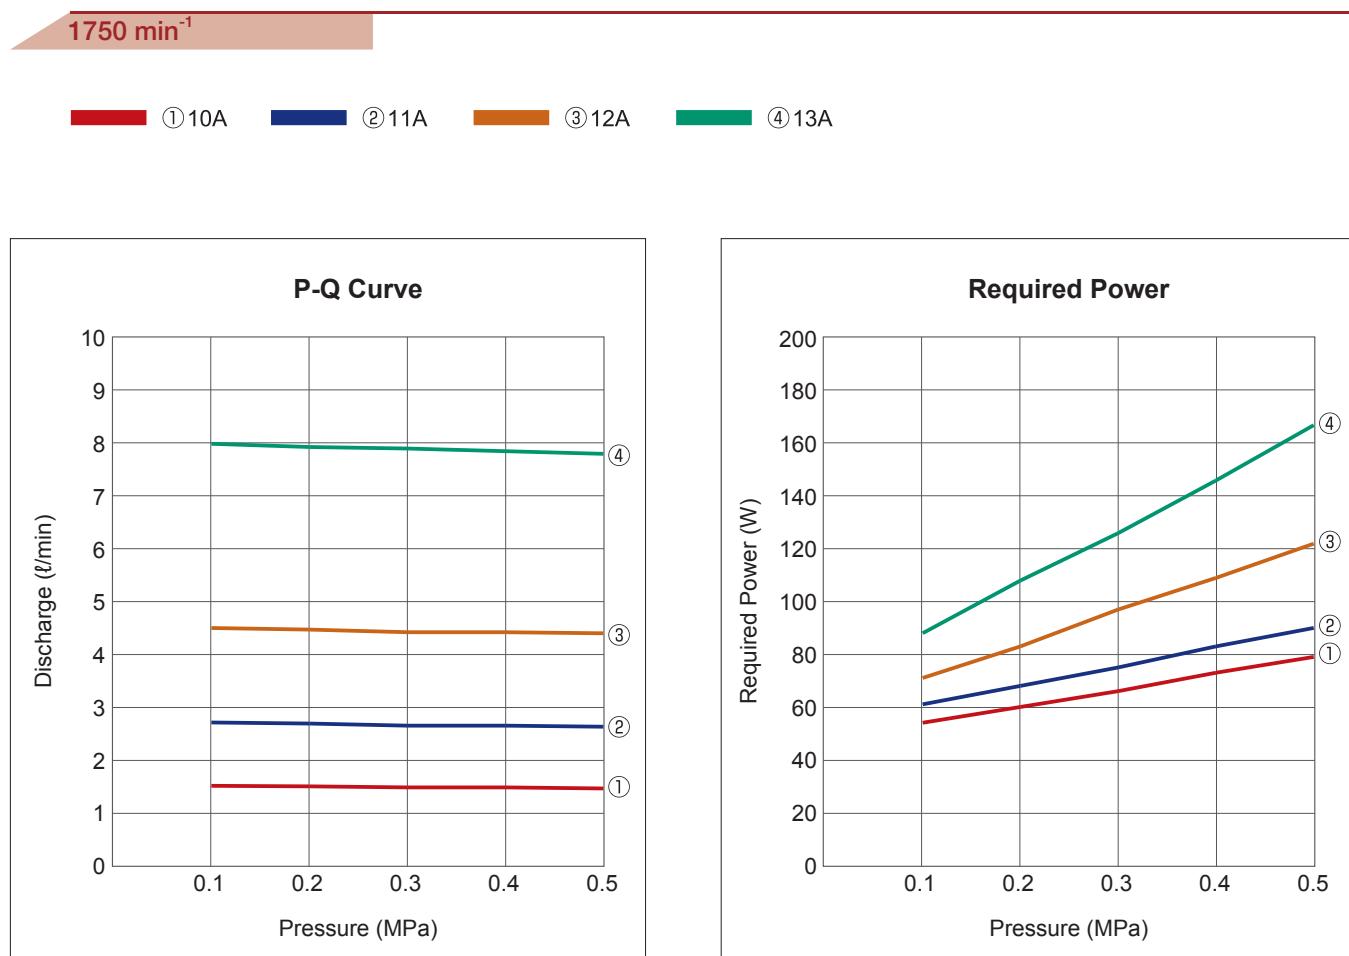

| Model | Item | Discharge (ℓ/min) | | | | | Required Power (W) | | | | |
|----------------|------|--------------------------|------|------|------|------|--------------------|-----|-----|-----|-----|
| | | Pressure (MPa) | | | | | Pressure (MPa) | | | | |
| | | 0.1 | 0.2 | 0.3 | 0.4 | 0.5 | 0.1 | 0.2 | 0.3 | 0.4 | 0.5 |
| TOP-10A | | 1.51 | 1.50 | 1.48 | 1.48 | 1.46 | 54 | 60 | 66 | 73 | 79 |
| TOP-11A | | 2.71 | 2.69 | 2.65 | 2.65 | 2.63 | 61 | 68 | 75 | 83 | 90 |
| TOP-12A | | 4.50 | 4.47 | 4.42 | 4.42 | 4.40 | 71 | 83 | 97 | 109 | 122 |
| TOP-13A | | 7.99 | 7.98 | 7.85 | 7.85 | 7.80 | 88 | 108 | 126 | 146 | 167 |